



CLIMASNAP®

nmcnaturefoam®

Pipe insulation made from polyethylene-based closed-cell foam made of NMC Naturefoam® which contains at least 50% of renewable raw materials, with a patented closing system offering the best technical properties for heating and plumbing applications.

- Reduce energie loss

Product properties


- Thermal conductivity (DIN 52613 / EN ISO 8497):
0,042 W/mK at 10°C
0,049 W/mK at 40°C
0,058 W/mK at 70°C
- Fire performance: Euroclass E (EN 13501-1)
- Operating temperature range: 0°C to +100°C (EN 14707)
- Declaration of performance: see website www.nmc.eu/dop



NMC sa
Gert-Noël-Strasse B - 4731 Eynatten
Phone: +32 87 85 85 00
Fax: +32 87 85 83 55
E-Mail: info@nmc.eu



www.nmc-insulation.com

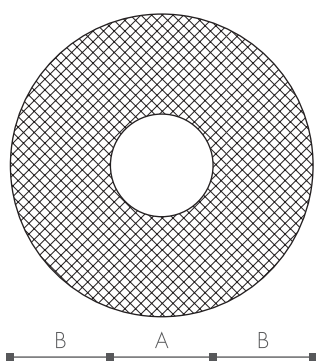

- Quick and easy application due to its patented closing system.
- Reduction of operating costs by reduction of energy losses.
- Protects drinking water pipes from unwanted heating and thus reduces the danger of Legionella bacteria.
- Reduction of CO₂-emission.
- Reduces popping and flow noises.
- Prevents the build-up of condensation and thus prevents corrosion.
- Please ensure correct fitting by following the processing tips on our website.

Product range

Type	A mm	B mm	Length	Packaging unit
12/15 - 15	15	15	1 m	96 m - 24 pack
18 - 15	18	15	1 m	84 m - 21 pack
22 - 15	22	15	1 m	80 m - 20 pack
28 - 15	28	15	1 m	60 m - 15 pack
35 - 15	35	15	1 m	48 m - 15 pack
42 - 15	42	15	1 m	40 m - 10 pack
48 - 15	48	15	1 m	16 m
60 - 15	60	15	1 m	12 m